




www.ipc-markt.de

## i915 GMt High Performance Pentium M – Fanless Mini - ITX Board

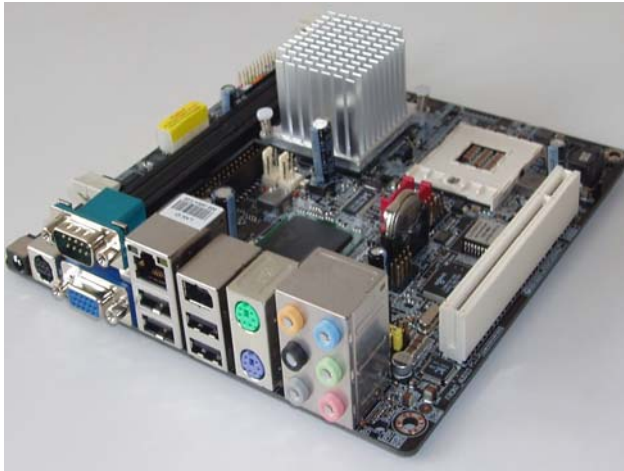

### Features

- Socket 479 for Intel Pentium Mobile CPU
- Hyper Threading Technology
- 533 MHz FSB
- Fanless Operation with optional Heatpipe
- Intel High- Performance Chipset
- Chipset Integrated VGA Function
- ALC 880 Audio
- 10/100/1000 Base TX Ethernet
- USB 2.0 Ports/ 2 Com-Ports
- 1 x PCI Slot (2 with RiserCard)

### Specification

Intel Socket 479 Pentium M (Dothan)  
Processors up to 2.2 GHz

### Hyper Threading Technology

**Core Logic** Intel 915 GM High Performance Chipset

### BIOS

Award Bios

### Front Side Bus

533 MHz

### Memory

**Dual Channel DDR II 533/400**  
**DDR II DIMM x 2 up to 2 GB**

### Graphics

**Onboard VGA Controller - integrated 915GM**

### Gigabit LAN Controller

Realtek Gbe LAN Controller

### OnBoard IDE + SATA

2 x Ultra DMA devices  
2 x sATA Devices

### Audio

Realtek ALC 880 onBoard 7.1 Channel

### IEEE 1394

Agere IEEE 1394 Controller to support 2 Ports

### Multi I/O

1 x RS-232 (Com 1/ 2) by Pin Header  
1 on Rear Panel

### Keyboard Mouse Connector

Staked Connector for Keyboard & Mouse

### USB

4 x USB ports

### Audio on Rear Panel

1 x 7.1 Audio Pin header or port ( for Mic In,  
Speaker Out, Line I, Rear Surround, Center  
Subwoofer)

### S-Video on Rear Panel

### Expansion

1 onBoard PCI-Slot  
up to 2 PCI - Cards with 1 / 2 Slot Riser-Card

### Environmental

Operating Temperature : 0 ... 60 ° C  
Storage : -20 ... 85 ° C  
Rel. Humidity : 10% .. 90 % (non-Condensing)  
Fanless Operation with Passive Cooler/Heatpipe

### Power Requirements :

#### Single voltage

12 – 19 VDC by ext. Connector

Power Supply included

### Approvals

CE, FCC

### Formfactor

Mini ITX

### Dimensions

170 x 170 mm



Rear Panel