




www.ipc-markt.de

32" HDTV Media Terminal

The optimum Viewing Point on Exhibitions & Showrooms

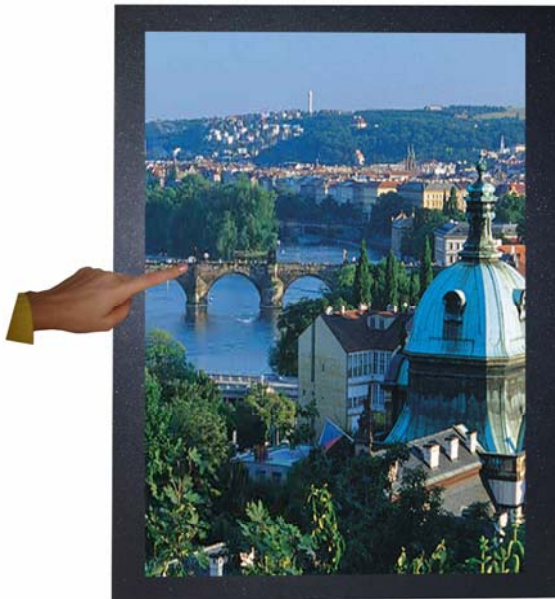

Superslim Media Aluminum Housing System

- 32" - High Brightness TFT with **HDTV** Resolution
- Brightness 500 cd/qm
- Vertical & horizontal Position
- Infra-Red-Touchscreen (Option)

including fanless Industrial - PC

- **Intel ATOM / PentiumM or Core2Duo CPU**
- Wireless LAN Module

Specification Monitor

Resolution	1360 x 768 16:9
Eff. Display Area	475 x 297 mm 32"
Colors	16,7 Mio
Response Time	8/8 ms
Contrast Ratio	4000 : 1
Brightness	500 cd/qm
Viewing Angle	H 178 x V178
Input Signal	Analog VGA / DVI HDMI , SVideo , Comp
Input Connector	D-sub 15pin VGA, HDMI, Cinch
Scan Frequency	H: 49 KHz V:60 HZ
Power Mgmt	VESA DPMS

1. Ultra Low Power fanless on Board Intel Single or Dual Core Atom Processor

- Intel® 945GM Chipset
- 2 x RS/232, LPT1, 4 x USB , SATA x 2
- GB LAN (1000 MB/s) , **DUAL GB-LAN** (opt.)
- PCI-Slot
- (Opt. Extended Temperature Range -40...+85 ° C)

2. Low Power fanless Intel Pentium M Processor (Centrino)

- Socket 478 for Intel **Pentium M Processor** 1.6 GHz
- Hyper Threading Technology
- 533 MHz FSB
- Fanless Operation with Heatpipe
- Intel® i915 Chipset
- Gigabit LAN
- 6 x USB-Ports/ 2 Com-Ports
- SATA x 2, **SATA Raid (opt.)**
- PCI-Slot , Mini PCI, PCIe (1), Mini PCIe

3. Fanless Intel Core2Duo CPU

- **Socket 478** for Intel **CoreDuo CPU T-2300/T-2500**
- **Socket P** for **Penryn CPU (P-8400)**
- Mobile Intel® 945GM Chipset
- Supports CRT, LVDS, optional TV out or DVI
- Single/Dual GB-LAN, **Triple GB-LAN** (opt.)
- 6 x USB-Ports/ 2 Com-Ports (RS-232/422), (4 opt.)
- SATA x 2, **SATA Raid (opt.)**
- PCI-Slot , Mini PCI, PCIe (1), Mini PCIe

Environmental

Operating Temperature : 0 .. .50 ° C

Storage : -20 ...80 ° C

Rel. Humidity : 10% .. 90 % (non-Condensing)

Dimensions

768 x 458 x 113 mm (H x W x D)

Approval

CE, FCC