

POC-200 series

Ultra-compact Atom™ Bay Trail-I Fanless Embedded Controller with PoE and USB 3.0



Features

- Ultra-compact 15 cm x 10 cm (6" x 4") footprint
- Intel® Atom™ E3845 1.91GHz quad-core processor
- Rugged, -25°C to 70°C fanless operation
- Two 802.3at (25.5W) Gigabit PoE ports
- Three USB 3.0 ports and One USB 2.0 port
- One 2.5" SATA HDD/SSD accommodation
- Up to two RS-232/422/485 ports and two RS-232 ports

Introduction

POC-200 is a breakthrough of Neosys' ultra-compact controller series. Inheriting the concept of favorable POC-100, POC-200 series further incorporates greater computing power and more versatile functions in its 3.5" HDD footprint.


The new Intel® Atom™ Bay Trail processor brings a leaping for both arithmetic and graphics performance. With Atom™ E3845 quad-core processor, POC-200 can deliver more than 200% performance over previous D525/D2550 platform. It also feature comprehensive I/O interfaces to make use of the advance of computing power. Two Gigabit Ethernet and three USB 3.0 ports are integrated so you can connect GigE/USB3 cameras for vision applications. Its IEEE 802.3at PoE option is capable to supply 25.5W each port to power you IP camera for surveillance applications. POC-200 also features up to four COM ports and digital I/O for general-purpose industrial applications.

Size is another attractive feature of POC-200. Its 6"x4" footprint makes installation of POC-200 extremely easy. And its -25°C to 70°C operating temperature eliminates the restriction for deployment environment. Provides derivative models with different CPU and I/O configuration so you can always find a fit POC-200 for your application.


Product Highlights

Leaping of Performance for Atom

Leveraging 22 nm lithography, the latest Intel® Atom™ Bay Trail processor brings significant performance advance. POC-200 utilizes quad-core Atom™ E3845 CPU and is about 240% faster than previous D525 platform. Its integrated Intel® HD Graphics engine, moreover, can offer outstanding performance for 3D and video codec.

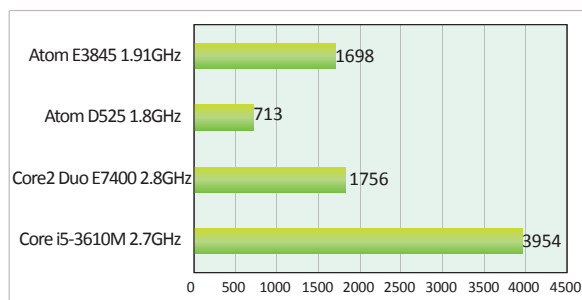

* The CPU benchmark is performed using Passmark PerformanceTest 7 based on Win7 64bit OS.

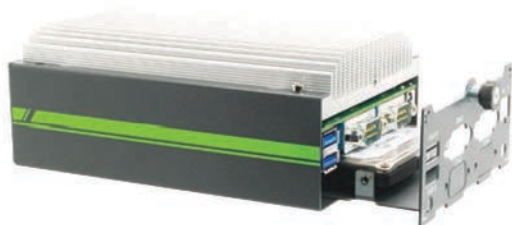

All-in-One Compact Chassis

Though POC-200 takes only a 3.5" HDD footprint, it possesses everything needed for an embedded platform. USB 3.0, COM ports, digital I/O and DVI/VGA are natively integrated on-board. It can accommodate one 2.5" HDD/SSD inside to provide larger storage capacity. For POC-212/222, an ingenious easy-swap HDD tray is provided for quick HDD installation/replacement.

Gigabit Ethernet and IEEE 802.3at PoE

POC-200 is the smallest embedded controller that integrates multiple IEEE 802.3at PoE ports. As each port can supply 25.5W power, POC-200 is a turnkey platform for connecting PoE Powered Device (PD), such as GigE camera, IP camera, wireless AP and etc. This PoE capability gives great convenience for your vision or surveillance applications.



Application



1. Robot Vision
2. Object Inspection
3. Industrial Control and HMI
4. Real-time Surveillance

POC-200 Series Specifications

	POC-200	POC-210	POC-212	POC-222		POC-200	POC-210	POC-212	POC-222
System Core					Power Supply				
Processor	Intel® Atom™ E3845 1.91 GHz quad-core processor			Intel® Atom™ E3825 1.33 GHz dual-core processor	DC Input	Built-in 8~35 VDC DC input			
Graphics	Integrated Intel® HD Graphics				Input Connector	2-pin pluggable terminal block for DC input			
Memory	1x SODIMM socket for DDR3L-1333, up to 8GB			DDR3L-1067, 4GB	Mechanical				
Panel I/O Interface					Dimension	149mm (W) x 105 mm (H) x 57 mm (D)		149mm (W) x 105 mm (H) x 53 mm (D)	
Ethernet	2x Gigabit Ethernet ports by Intel® I210 GbE controller				Weight	1.05 kg			
PoE	IEEE 802.3at PoE PSE (25.5W each GbE port)		N/A		Mounting	Wall-mount (Standard) ; DIN-rail mount (Optional)			
Video Port	1x DVI-I connector for both analog RGB and DVI/HDMI outputs				Environmental				
Serial Port	2x RS-232/422/485 (COM1 & COM3) 2x RS-232 (COM2 & COM4)		1x RS-232/422/485 (COM1) 1x RS-232 (COM2)		Operating Temperature	-25°C ~ 70°C with SSD, 100% CPU loading */** -10°C ~ 50°C with HDD, 100% CPU loading */**			
USB	3x USB 3.0 ports ; 1x USB 2.0 port				Storage Temperature	-40°C ~85°C			
Audio	1x Speaker-out				Humidity	10%~90% , non-condensing			
DIO	4-CH isolated DI 4-CH isolated DO		8-CH 5V TTL GPIO (Standard) 4-CH isolated DI + 4-CH isolated DO (Optional)		Vibration	Operating, 5 Grms, 5-500 Hz, 3 Axes (w/ SSD, according to IEC60068-2-64)			
Internal I/O Interface					Shock	Operating, 50 Grms, Half-sine 11 ms Duration (w/ SSD, according to IEC60068-2-27)			
Mini-PCIe	1x mini PCI Express slot with USIM socket				EMC	CE/FCC Class A, according to EN 55022 & EN 55024			
Storage Interface					* The 100% CPU loading is applied using Passmark® BurnInTest™ v7.0. For detail testing criteria, please contact Neosys Technology				
SATA	1x internal SATA port for 2.5" HDD/SSD		1x internal SATA port with easy-swap HDD tray for 2.5" HDD/SSD		** For sub-zero operating temperature, a wide temperature HDD drive or Solid State Disk (SSD) is required.				

Order Information

POC-200

Intel® Atom™ E3845 ultra-compact controller with 2x 802.3at PoE ports, 3x USB 3.0 and 4x COM ports

POC-210

Intel® Atom™ E3845 ultra-compact controller with 2x GbE ports, 3x USB 3.0 and 4x COM ports

POC-212

Intel® Atom™ E3845 ultra-compact controller with 2x GbE ports, 3x USB 3.0 and 2x COM ports

POC-222

Intel® Atom™ E3825 ultra-compact controller with 2x GbE ports, 3x USB 3.0 and 2x COM ports

Option of DIN-rail mounting kit

60W AC/DC power adapter with 12V, 5A DC output