



Features

- Fanless design
- Intel H110 chipset
- VGA, HDMI, DP, 2(4)GLAN, 4COM, 2USB2.0, 4USB3.0, Audio
- 2 x 2.5" HDD/SSD
- 6 ~ 30VDC
- Wallmount support

System

CPU	7 th /6 th Gen. Intel Core i7/i5/i3 & Celeron Processor (CPU TDP max. Up to 35W)
Memory	2 x DIMM, DDR4 2133Mhz, Up to 32GB
BIOS	AMI
Watchdog Timer	Interval: Programmable 1 ~ 255 sec.
Graphic	Intel HD Graphics (by CPU)
Storage	2 x 2.5" SSD/HDD, 1 x mSATA
System Indicators	1 x Power LED, 1 x HDD LED
System Controls	1 x Power switch 1 x Reset switch 1 x Remote power switch
Power Type	6 ~ 30VDC
Expansion	1 x PCIe x16 or PCIe x4 1 x Mini-PCIe (Full-size) 1 x SIM slot

I/O

Serial Port	3 x RS-232, 1 x RS-232/422/485
Ethernet	i219LM, i211AT, (option : 4 GLAN)
USB	4 x USB 3.0 port , 2 x USB2.0 port (Option: internal 1 x USB2.0 port)
Display	1 x VGA, 1 x HDMI, 1 x DP
Audio	Mic-in, Line-out
Other	2 x SMA type connector opening for antenna

Remark:

1. ODM/OEM is available
2. Specifications are subject to change without prior notice

Mechanical

Construction	Aluminum + Steel
Dimension (WxDxH)	188 x 215 x 134 mm
Weight(net)	3.8kg
Mounting	Wallmount

Environment

Operation Temperature	Ambient air flow: -10°C~55°C (14F ~ 131F), with SSD/mSATA
Storage Temperature	-20°C~75°C (-4F ~ 185F)
Relative Humidity	10% ~ 90% (non-condensing)
Vibration	With SSD/mSATA : 3Grms, Random, 5 ~ 500Hz
Certification	CE

Packing List

1 x sBOX9611 system unit
1 x Driver CD
4 x Foot pad
1 x Screw pack
1 x Mounting kit



Ordering Information

sBOX9611-2GE6	Fanless system w/ H110, VGA, HDMI, DP, 2GLAN, 4COM, 6USB, PCIe x16, 6~30VDC
sBOX9611-4GE6	Fanless system w/ H110, VGA, HDMI, DP, 4GLAN, 4COM, 6USB, PCIe x16, 6~30VDC
sBOX9611-2GE4	Fanless system w/ H110, VGA, HDMI, DP, 2GLAN, 4COM, 6USB, PCIe x4, 6~30VDC
FSP150	150W Power adapter
USB-200-300	Internal 1 x USB2.0 port

* We strongly recommend to order CPU and memory together



I/O

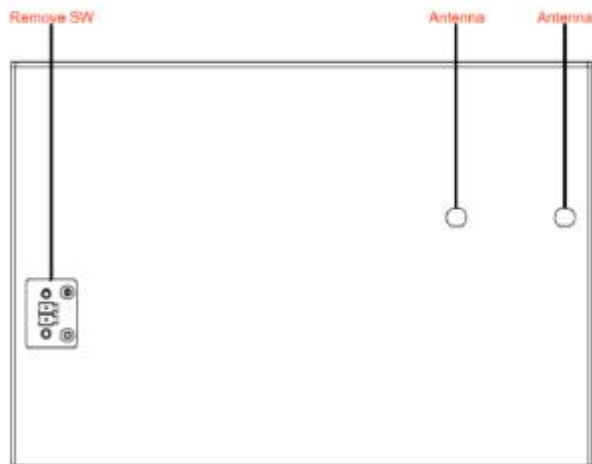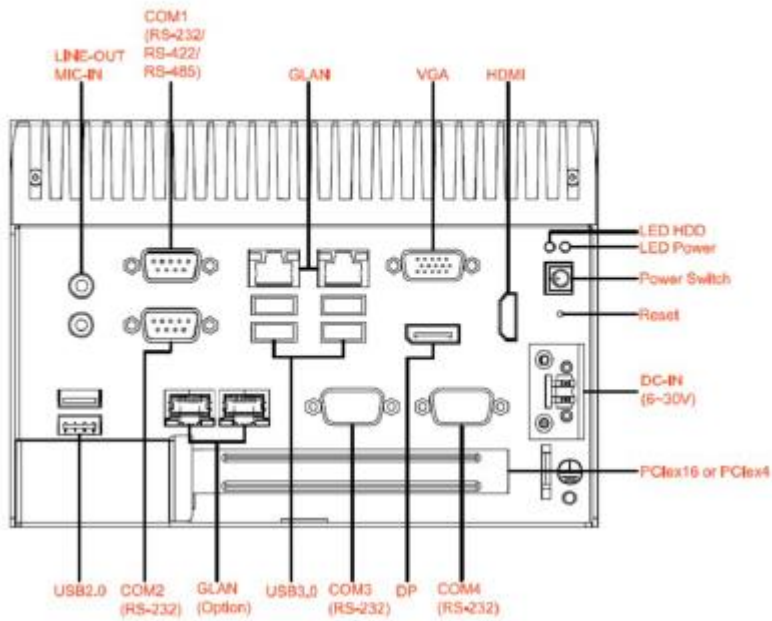



Dimension

