

## Industrial Monitor HI-20T

### The Versatile 20,1 " Color Touchscreen Monitor



### Features

- Excellent Brightness & Contrast
- **16:12 (4:3) Presentation**
- Stereo Speaker
- Inputs :  
VGA, S-Video, Comp-Video
- 5 Wire resistive Touchscreen (RS/232 or USB )
- Capacitive Touchscreen (optional)
- VESA- Holder
- Panel Mounting
- Full Metall Sheet Chassis for optimal electrical and thermal protection


Model NO.	HI-20T	
Viewing Area	20,1"	
Touch Panel	E-Turbo	5 Wire Resistive
Resolution	1600x1200	UXGA
Eff. Display Area	381,1x 318,1	mm
Colors	16 Mio	
Response Time	8/8 ms	
Contrast Ratio	1000 : 1	
Brightness	300 cd/qm	
Viewing Angle	H 170 x V170	
Input Signal	Analog VGA /	Video Comp on
Input Connector	D-sub 15pin /	/Cinch, S Video
Scan Frequency	H:30- 94 KHz	V: 50-80Hz
Power Mgmt	VESA DPMS	Standard
Consumption	80W @12VDC	Opt. Extern. 12 V Adapt.
Dimensions (mm)	See Drawing	
Op. Temperature	0-50 Degr. C	
Weight	6,5KG	
Standard	IP-65 (Front)	(Optional)

### Optional Accessories





**Holder for Mini-IPC  
Back-Site Mounting**

**Swingarm**

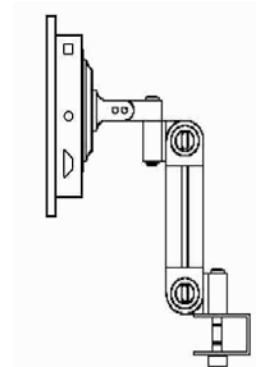

### 20" Panel-Mounting

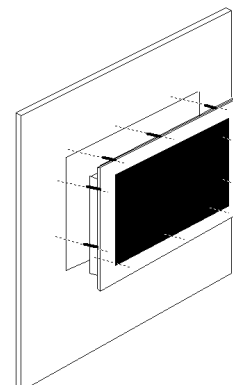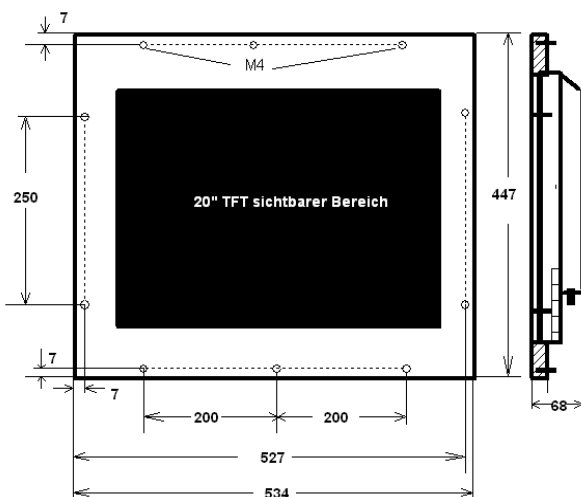

**Panel-Mounting**