
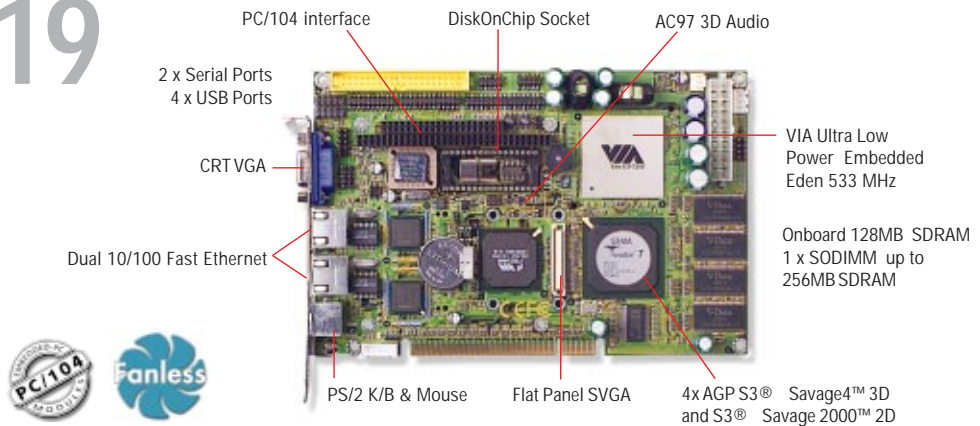


EmCORE-v619

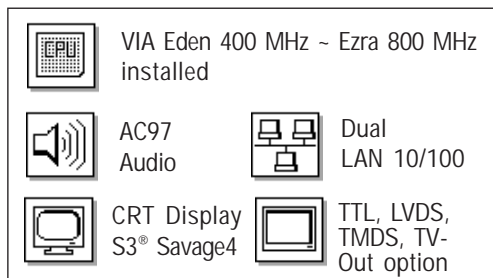

Low Power VIA Eden™ EBX

with Flat Panel / CRT SVGA, Dual Ethernet and Audio

General Specifications

CPU (installed)

VIA Ultra Low Power Embedded Eden 400 MHz ~ Ezra 800MHz processor with FSB 66, 100, 133 MHz EBGA package.

Available in different speeds by OEM order.

Chipset

VIA VT8606 Twister™ North Bridge with integrated Savage4™ AGP 4X Graphics core and VT82C686B "Super" Southbridge

BIOS

AWARD 256 KB Flash BIOS

Green Function

power saving options supported in BIOS. DOZE / STANDBY / SUSPEND modes

DRAM Memory

onboard 128/256 MB SDRAM, one SO-DIMM socket supports up to 512 MB SDRAM, total memory capacity up to 768 MB

Bus Interface

PCI-bus and PC/104

PCI Enhanced IDE with Ultra DMA

supports one port and up to 2 ATAPI devices, Ultra DMA transfer 33/66 and 100 MB/sec

Watchdog Timer

128-level timer generates RESET or NMI when your application loses control over the system.

Real-time Clock

built-in chipset with lithium battery backup for 10 years of data retention. CMOS data backup of BIOS setup and BIOS default

AudioChipset

Chipset

VIA VT82C686B, AC97 2.0compliant, Multi-stream Direct Sound and Direct Sound 3D acceleration

Interface

LINE-in, CD Audio in, Mic in, Speaker out

PC/104 Interface

Bus types

104-pin ISA (8/16-bit)

High Speed Multi I/O

Chipset

included in VT82C686B "Super" Southbridge

Serial ports

1 high speed RS-232C ports (COM1),
1 high speed RS-232C/422/485 port (COM2)
Both with 16C550 UART and 16 byte FIFO.

USB Ports

four USB ver1.1 ports

SIR Interface

onboard IrDA TX/RX port

Floppy Disk Drive Interface

supports 2 floppy disk drive, 3½" (720 KB, 1.44 MB, 2.88MB)

Bi-directional Parallel Port

supports SPP, EPP and ECP mode.
BIOS enabled/disabled

Keyboard and Mouse Connectors

PS/2 KB/Mouse port on bracket

Network Interface

Chipset

2x Intel 82559 (EmCORE-v619VL2/N Series)

2x RTL8139C (EmCORE-v619VL2/R Series)

Type

10BASE-T / 100BASE-TX, autoswitching

Connector

external RJ-45 with LEDs

Flash Disk DiskOnChip® 2000

Package

Single Chip FlashDisk in 32-pin DIP JEDEC

Capacity

up to 288 MByte

SSD Interface

SSD Type

One Compact Flash socket supports Type I/II Compact Flash Cards (CFC)

Capacity

up to 512MB CFC

Display Controller

Chipset

4x AGP S3® Savage4™ 3D and S3® Savage 2000™ 2D engines integrated in VT8606
Supports up to 32 MB (shared) memory

Display Type

CRT (VGA, SVGA, XGA, SXGA)

Daughterboard kits available for TTL, LVDS, TMDS (DFP) Flat Panel and TV-Out connections.

Resolution

1280x768 @ 16 bpp or 1280x1024 @ 8bpp

Environmental and Power

Power Requirements

+5 V @ 1.8 A, +12V @ 0.13 A (typical) ;
(with Low Power Embedded Eden 533 MHz and 128MB SDRAM)

Board Dimensions

185 x 127 mm

Board Weight

0.28 Kg

Operating Temperature

0 to 60°C (32 to 140°F)

Ordering

EmCORE-v619VL2/N: Half-size PCI-based VIA Eden 533 MHz CPU Card with 128 MB SDRAM, Dual Intel 82559 Fast Ethernet, AC97 3D Audio, PC/104 and Compact Flash interface

EmCORE-v619VL2/R: Same as above with Dual Realtek 8139C Fast Ethernet interface

SCDB-1221: Flat Panel TTL/LVDS/TV-Out Daughterboard

SCDB-1222: Flat Panel TMDS/TV-Out

